




## Pressure Transducer Heavy Duty Industrial Piezoresistive



measuring  
•  
monitoring  
•  
analysing

SEN-3276/3277

Option:  
pluggable sandwich  
display Model AUF

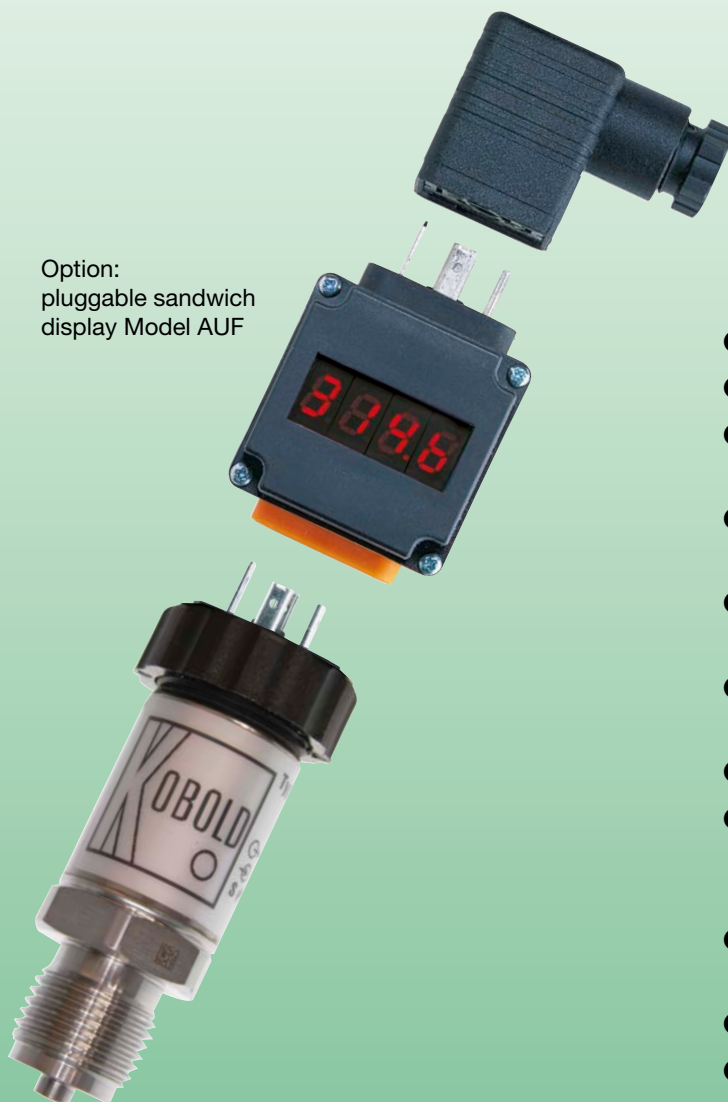

- Gauge pressure
- Internal diaphragm
- Measuring range:  
0.1...0 to 0...25 bar
- Measuring span  
from 100 mbar
- Temperature (medium):  
max. 100 °C
- Accuracy class:  
0.25 or 0.5
- Material: stainless steel
- Connection: G 1/2, G 1/4,  
1/4" NPT and 1/2" NPT  
on request
- Oil and grease free  
on request
- LABS free on request
- Absolute pressure  
on request



P2

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, EGYPT, FRANCE,  
GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO,  
NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, RUSSIA, SPAIN,  
SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com




## Description

The Heavy Duty Industrial pressure transducers are the leaders among the pressure transducers. The thin-film technology of the sensor element fulfils the most demanding requirements.


Case and wetted parts are stainless steel. Therefore they are extremely resistant against aggressive process liquids. The sensor is unaffected by shock or vibration. Two adjustment potentiometers permit the use of these pressure transducers in most difficult applications like measurement of the hydrostatic column.

## Dimensions [mm]

SEN-3276...

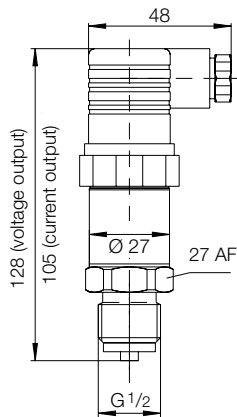

SEN-3277...

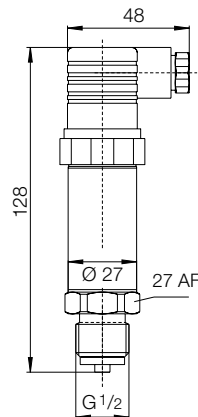

## Applications

- Plant construction
- Development and laboratory
- Process engineering
- Hydraulics
- Pneumatics

## Technical Details

Version:	internal diaphragm
Pressure type:	gauge pressure (absolute pressure)
Housing:	stainless steel 1.4301
Connection:	G 1/2 male thread acc. to EN 837; G 1/4 male thread, 1/4" NPT and 1/2" NPT on request
Wetted parts:	stainless steel 1.4571 and 1.4542
Sensor element:	piezoresistive
Max. temperature:	storage: -40...+100 °C medium: -30...+100 °C ambient: -20...+80 °C
Pressure limitation:	≤ 16 bar: 3.5 fold > 16 bar: 2 fold, vacuum-tight
Accuracy class:	0.25 or 0.5
Repeatability:	≤ ± 0.05 % of full scale
Stability per year:	≤ ± 0.2 % of full scale (under reference conditions)
Electrical connection:	plug acc. to DIN 43 650
Auxiliary power:	10 ... 30 V <sub>DC</sub> (14 ... 30 V <sub>DC</sub> for output 0 - 10 V)
Output:	4 - 20 mA (2-wire), 0 - 5 V <sub>DC</sub> , 0 - 10 V <sub>DC</sub>
Load (Ω):	≤ (U <sub>B</sub> - 10 V) / 0.02 A (for 4 - 20 mA) > 5 kΩ for 0 - 5 V > 10 kΩ for 0 - 10 V
Response time:	≤ 1 ms (within 10 - 90 % of full scale)
Adjustability:	zero-point and span up to ± 5 %
Temp. comp. range:	0 ... +80 °C
Temperature influence:	on zero-point and span ± 0.2 % / 10 K zero point for measuring range 0 ... 0.1 and 0 ... 0.16 bar ± 0.4 % / 10 K
Protection:	IP 65

## Order Details Sensor (Example: SEN-3276 C315)

Model	Output	Measuring range**		Connection
<b>SEN-3276...</b> Accuracy class 0.50 %	<b>without</b> = 4 - 20 mA, 2-wire <b>/1</b> = 0 ... 5 V <sub>DC</sub> <b>/2</b> = 0 ... 10 V <sub>DC</sub>	<b>C 406*</b> = -0.1 ... 0 bar	<b>B 146</b> = 0 ... 0.25 bar	<b>without</b> = plug Form A (DIN 43650) incl. junction box <b>3</b> = plug M12x1 (4-pin, IP 67) <b>5</b> = 2 m cable, IP 67
<b>SEN-3277...</b> Accuracy class 0.25 %		<b>C 416*</b> = -0.16 ... 0 bar <b>C 426</b> = -0.25 ... 0 bar <b>C 436</b> = -0.4 ... 0 bar <b>C 305</b> = -0.6 ... 0 bar <b>C 315</b> = -1 ... 0 bar <b>C 515</b> = -1 ... +1.5 bar <b>C 525</b> = -1 ... +3 bar <b>C 535</b> = -1 ... +5 bar <b>B 126</b> = 0 ... 0.1 bar <b>B 136</b> = 0 ... 0.16 bar	<b>B 156</b> = 0 ... 0.4 bar <b>B 015</b> = 0 ... 0.6 bar <b>B 025</b> = 0 ... 1 bar <b>B 035</b> = 0 ... 1.6 bar <b>B 045</b> = 0 ... 2.5 bar <b>B 055</b> = 0 ... 4 bar <b>B 065</b> = 0 ... 6 bar <b>B 075</b> = 0 ... 10 bar <b>B 085</b> = 0 ... 16 bar <b>B 095</b> = 0 ... 25 bar	

\* Only for SEN-3276...

\*\* Absolute pressure on request